
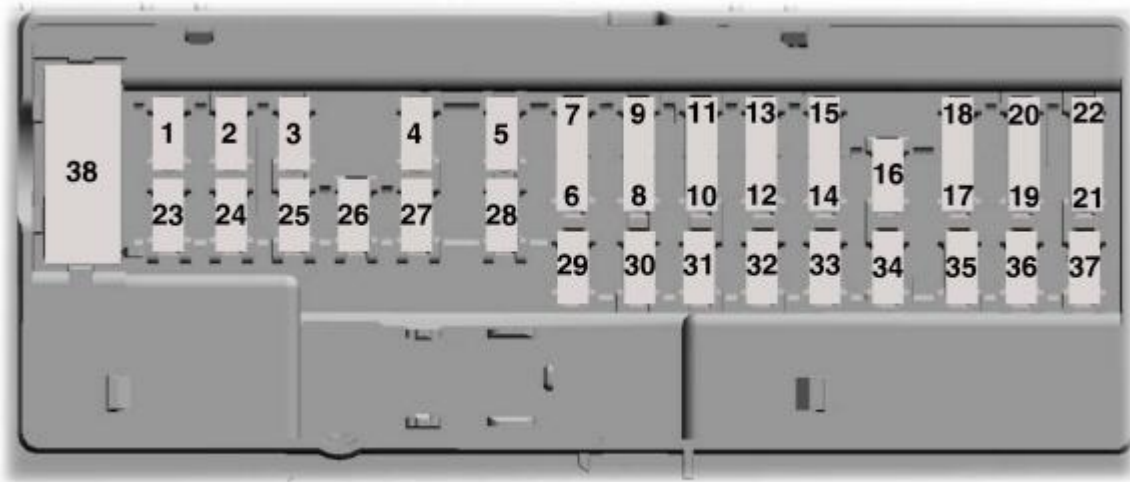



1. Locate the fuse panel in the passenger side kick panel and tap fuse #23 for accessory power.

Power

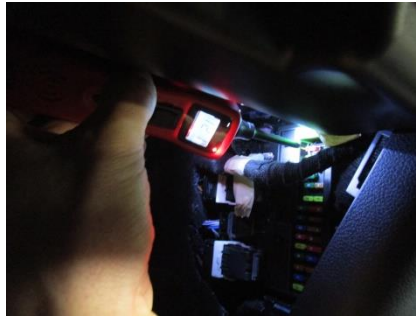

E145984

2. Run your accessory wire underneath carpet into the front of the center console. Follow factory console wire loom to run cable back to the rear of the center console.

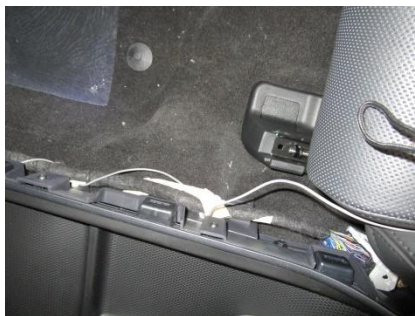

- Using the split in the carpet underneath the front seats, run the post cable wires into the back of the center console.



- Once all cables have been ran to the back of the center console, Follow the diagram below to complete all necessary power, ground, and post cable connections. Ground Connection should be made to the ground wire of the cigarette lighter socket or vehicles chassis.
- After all cables have been connected start up the vehicle and run a full functionality test of the system before reassembly.

Breakout cables

For connection hook up please follow the diagram as shown below.

